



Non binding image

EUROCAVE

PROFESSIONAL

VIN A S VERRE 8.0

Range	Wine by the glass dispenser
Function	To bring to serving temperature (2-temp) To preserve opened bottles
Capacity ⁽¹⁾	8 bottles in service / 6 to 8 bottles in storage

GENERAL FEATURES

- Packaged dimensions : 1140 x 1200 x 670 mm (H= 910 mm + accessories box 230 mm = 1140 mm)
- Dimensions including drip tray (HxWxD) 735 x 1035 x 585 mm ⁽²⁾ - Adjustable feet
- Net weight : 97 kg Gross weight : 117 kg
- Can be flush-fitted - see requirements
- Made in France

FUNCTIONAL FEATURES

- 2 independent compartments with adjustable temperatures: 6-15°C (43-59°F) on the left / 9-18°C (48-64°F) on the right
- 8 opened bottles (of which 4 Magnums possible ⁽³⁾) + 6 to 8 bottles in storage⁽⁴⁾
- Preservation of opened bottles up to 3 weeks
- 3 configurable doses per tap
- An interface for each use
 - A unique touch-screen for configuration & analysis
 - Rugged push buttons for the service
- Safety lock

TECHNICAL FEATURES

- Production of cold air Ventilated cold air - Compressor
- Refrigerant agent R600a
- Warm air production technology Heater
- Cords (external power) CE/UK/CH/AU/US/C6/JA
- Type of internal walls ABS
- Type of exterior coating Steel
- Type of insulation Expanded polystyrene
- Tap material PMMA
- Door material Full Glass - Triple glazing
- Preservation system Nitrogen injection

DESIGN

- Lighting : multicolored LEDs for each compartment and for the taps → > 200 shades
- Glass holder per compartment: adjustable & adapted to different sizes or kinds of glass. Holds up to 8 glasses
- Color of external panel : black

MORE & MORE SIMPLICITY...

- A unique touch screen : secure access for manager, integrated tutorials, wine sales statistics...
- Alert message: nitrogen leak, empty bottle, cleaning reminder...
- Cleaning system for all 8 taps simultaneously
- Automatic condensate evaporation

ENERGY CONSUMPTION & PERFORMANCE

Ambient temperature operating limits	10-35°C (50-95°F)
Consumption per 24h ⁽⁵⁾ (KWh)	0,765
Electrical Power consumption ⁽⁵⁾ (W)	75
Sound level	48 dB(A)

WARRANTY

2 years

Certifications




OTHER INFORMATIONS

- Compatible bottles (diameter dimensions):
Internal diameter: min ≥ 17.2mm – max ≤ 19.7mm
External diameter: max ≤ 32mm

(1) Traditional Bordeaux Bottles (75cl) 292-336mm (2) Dimensions include the rear stop - feet adjusted to the lowest (3) Magnums/bottles in service up to a height of 356 mm (4) Max height of the bottles = 320 mm (5) Calculation based on the results obtained over 24 hrs in standard conditions (25°C-77°F)


FLUSH-FITTING REQUIREMENTS

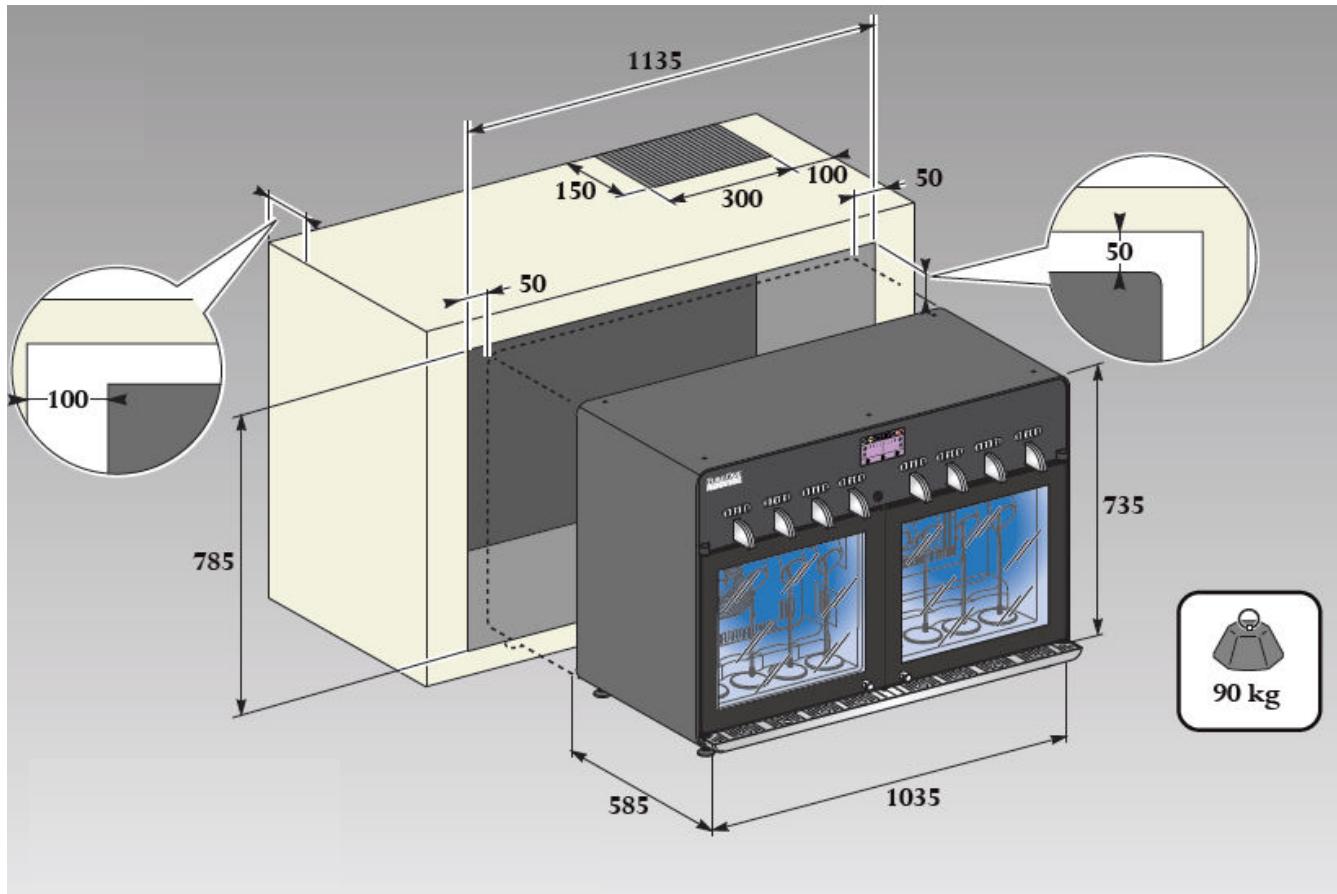

H x W x D = 735 x 1035 x 585 mm


Dimensions include the rear stop - feet adjusted to the lowest

- Maintain 5 cm on each side of the product and above the product
- Plan a ventilation hole on the top of the product
The ventilation hole must be
 - ✓ On the top of the device
 - ✓ To the rear edge of the product
 - ✓ At 100 mm from the side edge

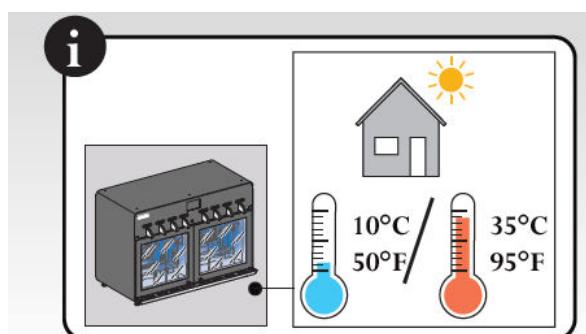


Plan a hole for the nitrogen cylinder connection tube

PRODUCT DESCRIPTION

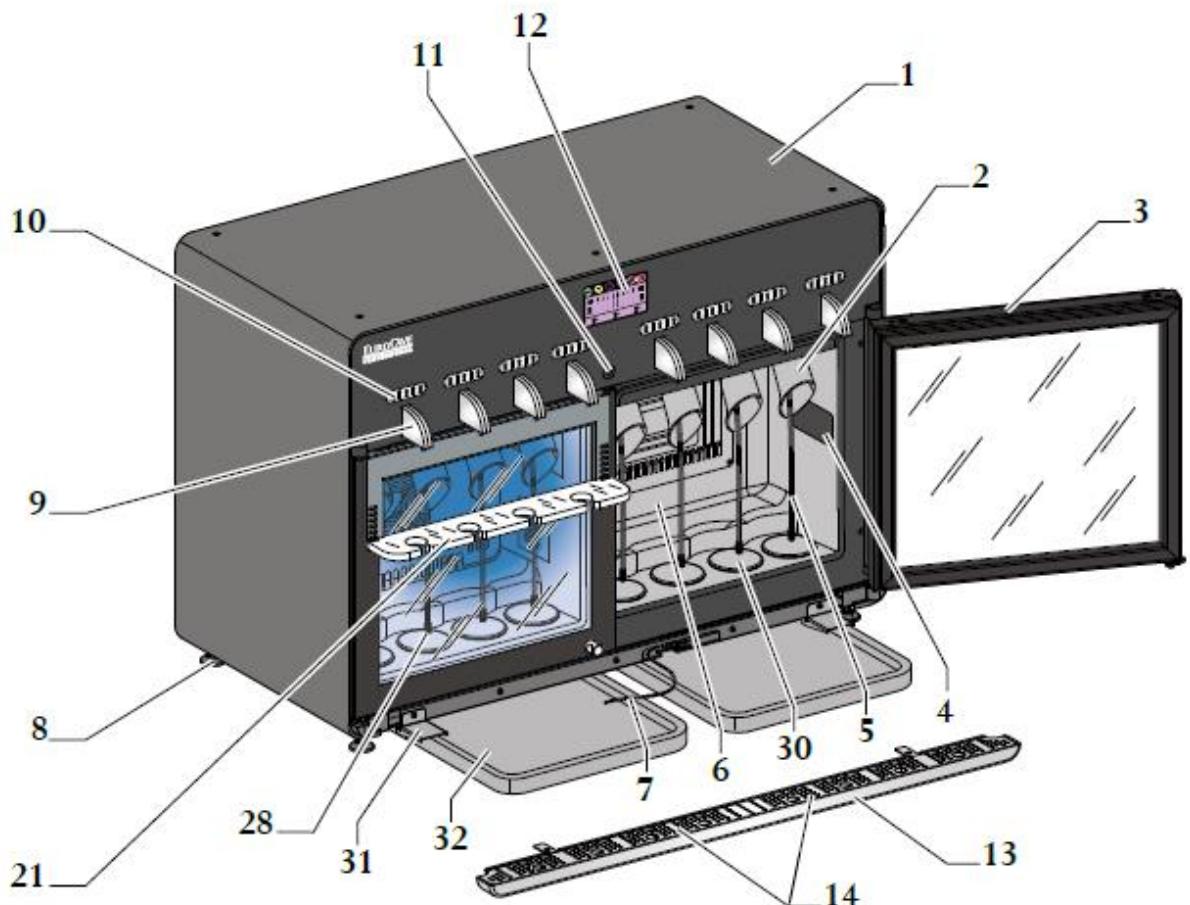

1. External casing	11. Central door lock
2. 8 articulated heads with bottle sockets	12. Touch screen
3. 2 full glass doors	13. Drip pan
4. 2 product identification labels with serial number	14. 2 grids of the drip pan
5. 8 plunge tubes	21. 2 glass holders
6. 2 service temperature compartments	28. Plunge filter/strainer
7. Cleaning tube	30. 8 adjustable bottle supports
8. Adjustable feet	31. Drip pan support brackets
9. 8 taps	32. 2 condensate collection drip trays
10. 3 measure selection keys per tap	

PRODUCT DESCRIPTION

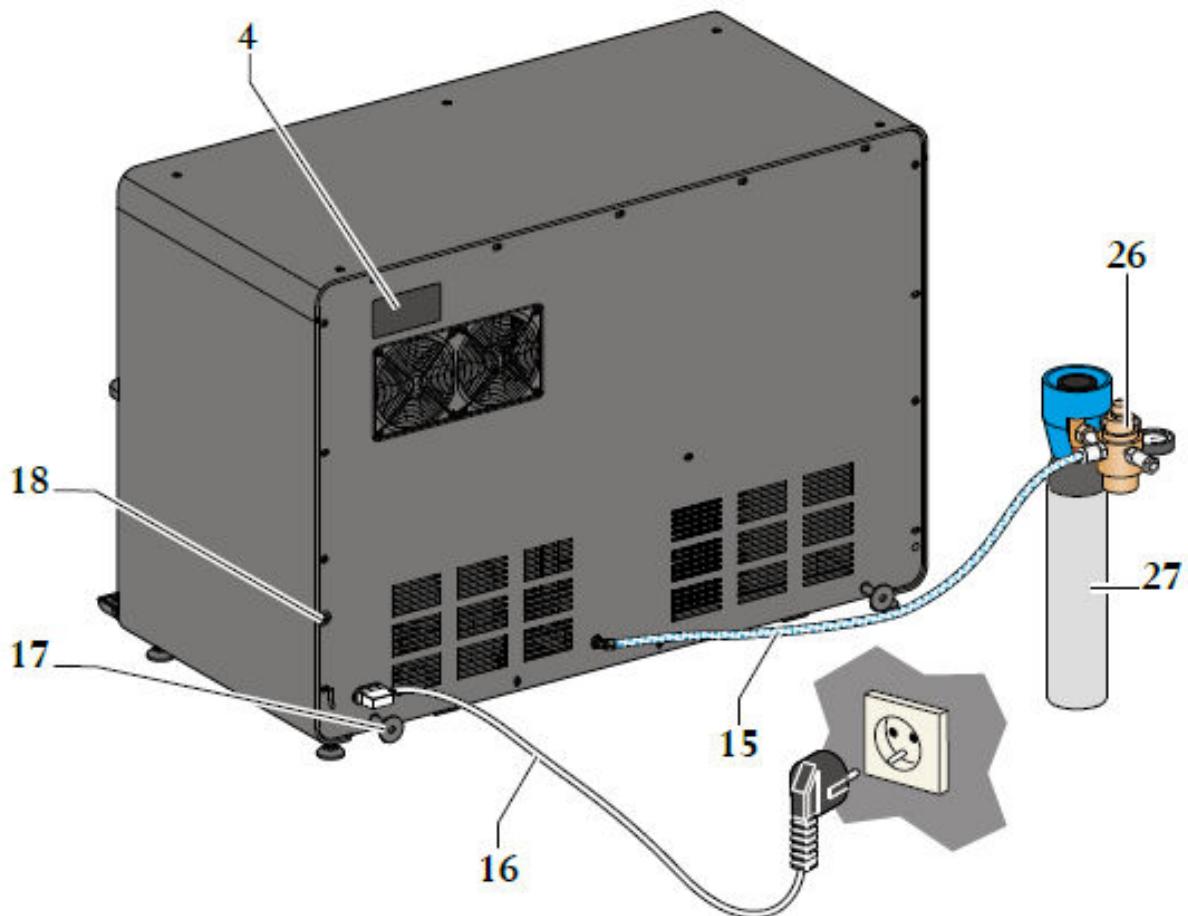

- 4. 2 product identification labels with serial number
- 15. Nitrogen cylinder connection tube (3m)
- 16. Power lead (2m)
- 17. 2 rear stops
- 18. Outlet for cash desk connection
- 26. Pressure reducer
- 27. Nitrogen cylinder (not supplied)